


CAB "U" HANGERS WITH CROSSBARS

These are strong hangers made for supporting all types of cables, pipe and tubing from roof bolt plates, spads, or other structure. All carrying surfaces receive a heavy coating of high dielectric grade plastisol for maximum insulation and abrasion resistance. These hangers are made from .187 high carbon spring steel wire for maximum strength and carrying capacity. They feature a locking crossbar to retain cables in the hanger and a large 7/8" diameter top loop for easy installation.



CAB 316
CAB 335
CAB 336

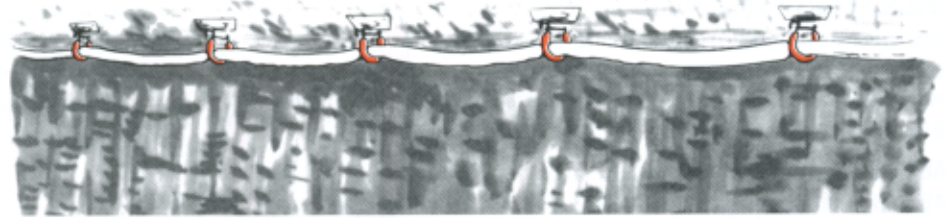

CAB "U" HANGERS WITH CROSSBARS

This is one of the most popular and versatile hangers for underground cable support. Offered in 3 standard sizes.

- CAB 316 3" diameter, 4-1/2" long, 100/Box, 17 lbs.
- CAB 335 4" diameter, 6" long, 50/Box, 11 lbs.
- CAB 336 5" diameter, 7" long, 50/Box, 13 lbs.

CAB "U" HANGERS WITH SAFETY-TIP CROSSBARS

Constructed the same way as standard "U" hangers but feature a rounded safety tip on the end of the crossbar. Prevents snagging during installations, when crossbars are left unlatched or in low roof conditions.

- CAB 221 3" diameter, 4-1/2" long, 100/Box, 17 lbs.
- CAB 344 4" diameter, 5-7/8" long, 50/Box, 12 lbs.
- CAB 222 5" diameter, 7-1/8" long, 50/Box, 14 lbs.



CAB 221
CAB 344
CAB 222

CAB CABLE RINGS

CAB rings are made from flat wire and are designed to firmly lock onto messenger wire for the aerial support of electrical cable. Made from high tensile copper-clad steel, bronze, galvanized steel or type 316 stainless steel. Any style of CAB Ring can be totally PVC coated to provide added resistance to corrosion, abrasion of cables and line slippage. CAB high dielectric grade gray PVC coatings also provide added insulation for electrical cables and are UV stabilized. Available with saddles for improved distribution of weight load. Ask for separate "CAB Ring" catalog for detailed information on this product line.



Ring Diameter	Maximum Cable Diameter	Length Under Strand	
		Standard	Long
1-1/2"	1-1/8"	2-1/2"	4"
2"	1-1/2"	2-7/8"	4-7/8"
2-1/2"	2"	3-1/2"	6"
3"	2-1/4"	4-1/8"	7-1/8"
3-1/2"	2-5/8"	4-1/2"	8"
4"	3"	5"	9"
4-1/2"	3-1/2"	5-1/2"	10"
5"	4"	6-1/4"	11-1/4"
6"	5"	7-1/4"	13"

SPECIFY SIZE OF STRAND OR MESSENGER WIRE WHEN ORDERING.

CAB BRATTICE HANGERS

are designed to quickly and easily suspend brattice cloth from the roof of a mine. Sharp offset tip makes installation easy and keeps brattice tight to the roof. Made from .187 wire, 7" long with 1-1/8" hole dia. For proper installation hanger must be placed between the plate and the roof of the mine.

- CAB 3703
200/Box, 17 lbs.



CAB 3703